



SPECIFICATION

HAIFEI INTELLIGENT EQUIPMENT CO. LTD

Mid Frequency Diffusion Welder for Copper

Model: HFTD-200-Y

1 set

Part Name	Description	Brand / Model No.	Quantity
Power Supplies			
1 Mid Frequency Transformer	Max.short cut current 42KA	TD-200 HAIFEI, China	1 set
Pressure Supplies			
2 Hydraulic oil station with elctric motor			1 set
Hydraulic control box			1 set
PLC controller			
3 PLC controller	Digital control circuit	Japan	1 set
	Touch Screen	Flexem, China	1 set
	Circuit breaker, air switch	Schneider, France	1 set
4 Inverse circuit	Medium frequency switch	IGBT Japan	2 sets
	Semi-control rectification	SCR Semikron, Germany	4 sets
	Welding capacitor	Japan	4 sets
	80% of the other components come from international brands		
5 Welding loop parts	copper strip and the copper plate, etc		1 set
6 Upper and bottom welding platform	high quality copper material, precisely machined		1 set
7 Cooling water circuit and protection circuit			1 set
Water cooling	Water flow switch	CATO, China	
The water flow switch is installed in the total circuit of water cooling system. If cooling water flow is insufficient, the controller will automatically give alarm and shutdown.			
8 Infrared temperature detection system			1 set
9 Body frame	High strength thick steel plates		1 set
10 Down-to-earth switch			1 set
11 Welding Consumables			1 set
Graphite block			




HAIFEI INTELLIGENT EQUIPMENT CO. LTD

Mid Frequency Diffusion Welder for Copper

Model: HFTD-200-Y

1 set

I transformer
inside

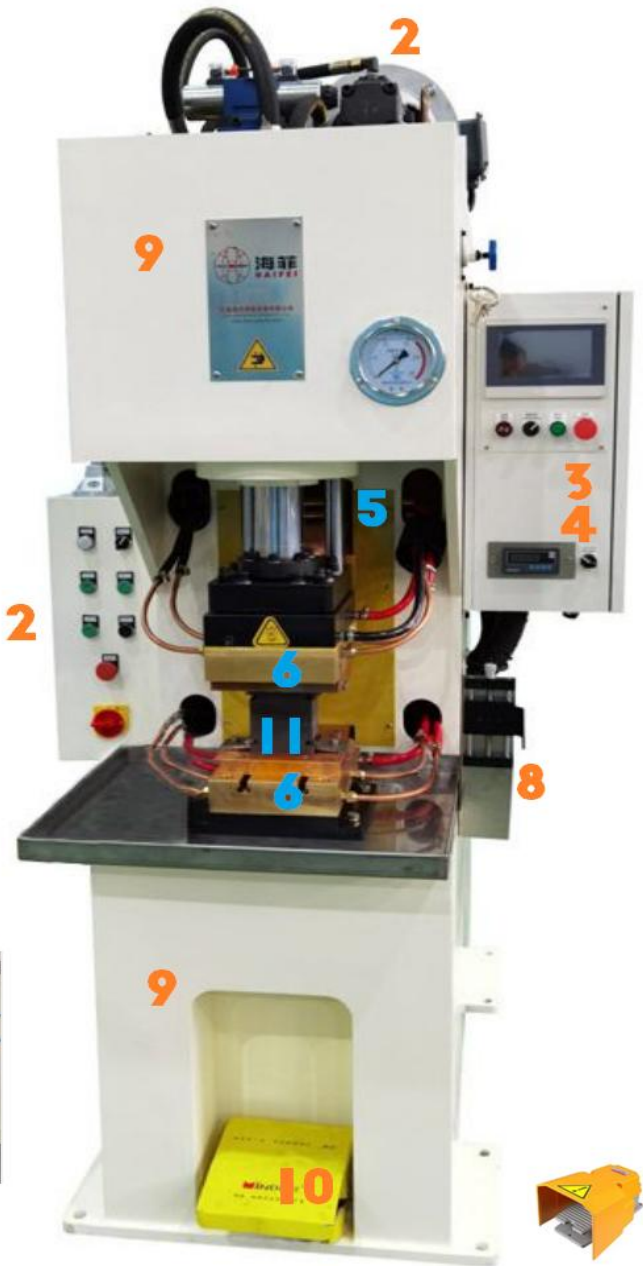

Mid Frequency Diffusion Welder for Copper
HFTD-200-Y

The picture is only for reference.



Main Parameters

HAIFEI INTELLIGENT EQUIPMENT CO. LTD

Main Parameters

1	Part Name	Mid Frequency Diffusion Welder for Copper
2	Model	HFTD-200-Y
3	Rated capacity	200KVA
4	Rated duty cycle	100%
5	Input power	415V±10% 50HZ 3 phases
6	Primary input current Max.	300A
7	Primary cable	3*50+2*16 mm ²
8	Secondary short-circuit current Max.	42KA
9	Secondary empty voltage	10.4 V
10	Transformer insulation grade	Grade F
11	Cooling water demand	0.2~0.3MPa, 40 micron filtration, Resistivity of 5 kΩ. cm
12	Cooling water flow rate	150 L/min water temperature ≤30℃
13	Hydraulic cylinder diameter	Ø120*250mm
14	Working pressure Max.	100KN
15	Throat depth	320mm
16	Maximum welding area	120*120*mm stack thickness 20mm
17	Working environment	temperature: 1~45℃ humidity: 20~80%RH